
# FUGA 2 RING SP UP DOWN



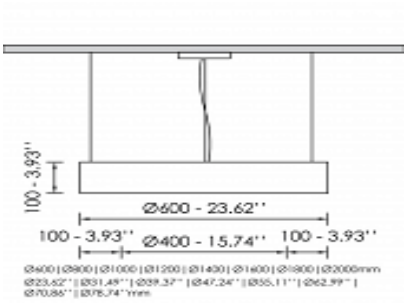


## Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | PRS0149CL003ON |
| Product family | FUGA |
| Diffuser | PMMA |
| Control Gear | Built-in ECG |
| Height | 100 |
| Diameter | 1800 |


### Electrical data


| | |
|---|---|
| Consumption | 341,1 |
| Performance | 75.02 |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 230 |


### Luminaire Output

| | |
|---|---|
| Beam Type | VW |
| Beam | 360º |
| Luminous Flux | 25583 |
| CRI CCT | 940 |
| Glare Indicator Ugr Longwise Optics | 12 |
| Glare Indicator Ugr Parallel Optics | 13 |

### Light distribution





### Safety characteristics

| | |
|---|---|
| IK | 04 |
| IP | 40 |
| Protection Class | Class I |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | UP: >50.000h L70B10@35°C<br>DOWN:>80.000h L80B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |