
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

COMIS LINE



Technical drawings

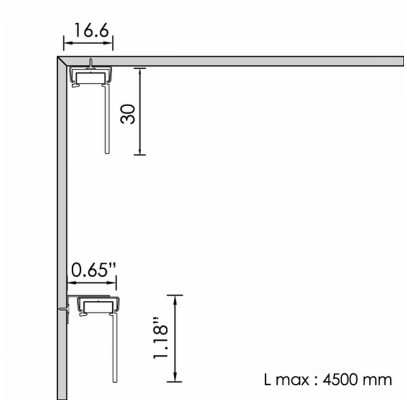

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRW0261CL002DA
Product family	COMIS
Diffuser	
Control Gear	Remote Electronic Driver
Width	16.6 mm
Length	1000 mm
Height	30 mm


Electrical data

Consumption	9.6 W
Performance	63.02 lm/W
Power Factor	0.96
Nominal Voltage	24 V

Luminaire Output

Luminous Flux	605 lm
CRI CCT	940

Light distribution



Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%