
BACKLIGHT PANEL IN PRISMATIC UGR IP65



Technical drawings

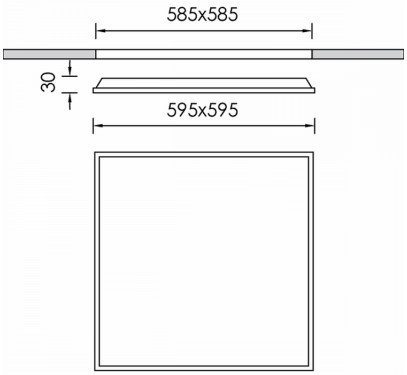

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	DL6393CL001DAC
Product family	HONOR
Diffuser	Prismatic Polycarbonate
Control Gear	Remote Electronic Driver
Options for Dimming Control	DALI2
Options for Wireless Dimming	Casambi
Width	595 mm
Length	595 mm
Height	30 mm


Electrical data

Consumption	32 W
Performance	117.19 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	37 V

Luminaire Output

Beam Type	XW
Beam	80º
Luminous Flux	3750 lm
CRI CCT	935
Glare Indicator Ugr Longwise Optics	19
Glare Indicator Ugr Parallel Optics	19

Light distribution

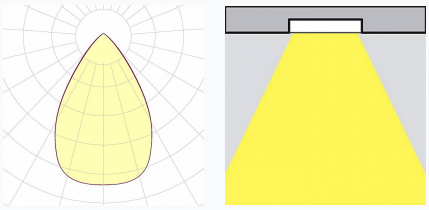

Safety characteristics

IK	04
IP	20

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%