
STATUS 3F H.P.LED



Technical drawings

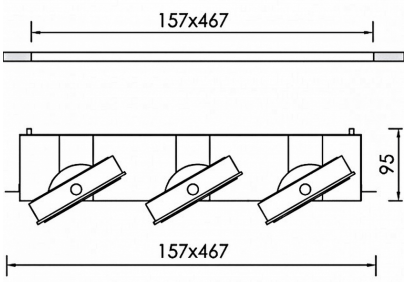

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Μέταλλο, Αλουμίνιο
Product code	DL7778CL003DAC
Product family	STATUS
Control Gear	Remote Electronic Driver
Options for Dimming Control	DALI2
Options for Wireless Dimming	Casambi
Width	157 mm
Length	467 mm
Height	95 mm


Electrical data


Consumption	35 W
Performance	95.14 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	3x21 V

Luminaire Output

Beam Type	UN
Beam	8º
Luminous Flux	3330 lm
CRI CCT	935
Glare Indicator Ugr Longwise Optics	4
Glare Indicator Ugr Parallel Optics	5

Light distribution





Safety characteristics

IK	07
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%