
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VIGOR IN M



Technical drawings

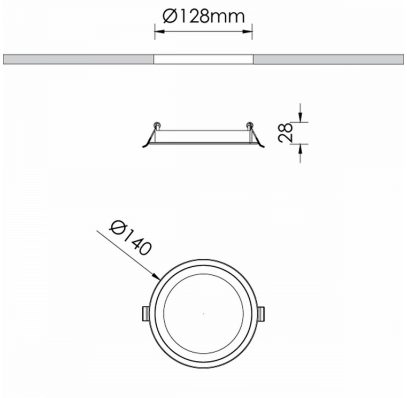

Product Details

CE LM80 LM79 TM21 REACH Source Type SMD LED

General Information

Housing	Aluminium
Product code	DL8474CL001DAC
Product family	VIGOR
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Height	28 mm
Diameter	140 mm


Electrical data

Consumption	10 W
Performance	91 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	VW
Beam	115º
Luminous Flux	875 lm
CRI CCT	935
Glare Indicator Ugr Longwise Optics	29
Glare Indicator Ugr Parallel Optics	29

Light distribution

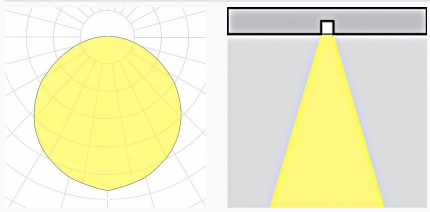

Safety characteristics

IK	04
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	20.000h
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%