
VIGOR IN XL



Technical drawings

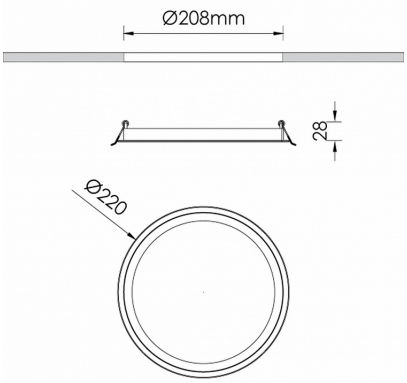

Product Details

CE LM80 LM79 TM21 REACH Source Type SMD LED

General Information

Housing	Aluminium
Product code	DL8475CL001DAC
Product family	VIGOR
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Options for Dimming Control	DALI2
Options for Wireless Dimming	Casambi
Height	28 mm
Diameter	220 mm


Electrical data

Consumption	21 W
Performance	87.14 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	VW
Beam	115º
Luminous Flux	1830 lm
CRI CCT	935
Glare Indicator Ugr Longwise Optics	28
Glare Indicator Ugr Parallel Optics	28

Light distribution

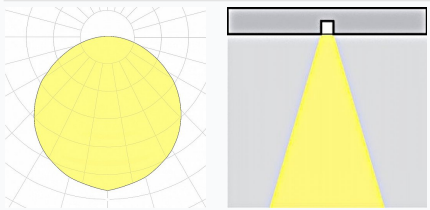

Safety characteristics

IK	04
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	20.000h
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%