
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# RITUS 80 MOB IP65



## Technical drawings

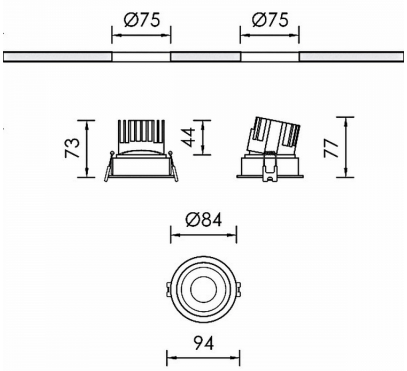


## Product Details

CE LM80 LM79 TM21 REACH Source Type COB LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | DL8949CL001DA |
| Product family | RITUS |
| Diffuser | |
| Control Gear | Remote Electronic Driver |
| Height | 77 mm |
| Diameter | 84 mm |


### Electrical data

| | |
|---|---|
| Consumption | 8 W |
| Performance | 101.07 lm/W |
| Nominal Voltage | 230 V |

### Luminaire Output

| | |
|---|---|
| Beam Type | N |
| Beam | 24º |
| Luminous Flux | 800 lm |
| CRI CCT | 930 |

### Light distribution



### Safety characteristics

| | |
|---|---|
| IK | 04 |
| IP | 65 |

### Temperature Operating Conditions