
NOVUS OUT OPAL TAPE LED



Technical drawings

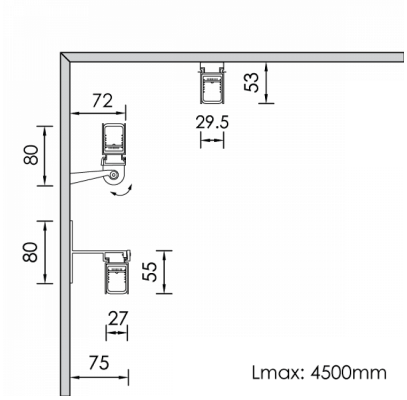

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRC1750CL001ON
Product family	NOVUS
Diffuser	
Control Gear	Remote Electronic Driver
Width	29.5 mm
Length	100 mm
Height	53 mm


Electrical data

Consumption	1,5 W
Performance	83 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	24 V

Luminaire Output

Beam Type	VW
Beam	119º
Luminous Flux	83 lm
CRI CCT	930
Glare Indicator Ugr Longwise Optics	28
Glare Indicator Ugr Parallel Optics	29

Light distribution



Safety characteristics

IK	10
IP	68
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%