
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

FIGO DZ UP DOWN



Technical drawings

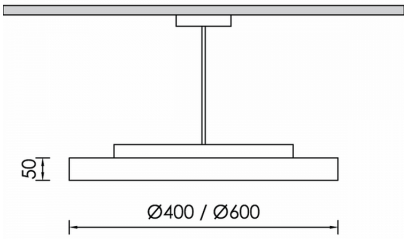

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	CM0887CL002ON
Product family	FIGO
Diffuser	Microprismatic
Control Gear	Built-in ECG
Options for Dimming Control	On-Off
Height	50 mm
Diameter	400 mm


Electrical data

Consumption	40 W
Performance	69 lm/W
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	VW
Beam	93º
Luminous Flux	2760 lm
CRI CCT	927
Glare Indicator Ugr Longwise Optics	20
Glare Indicator Ugr Parallel Optics	20

Light distribution

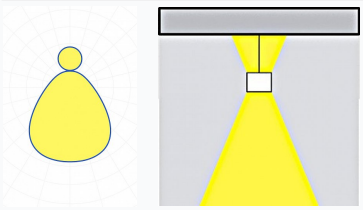

Safety characteristics

IK	04
IP	40

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%