HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

FIGO DZ UP DOWN



Technical drawings

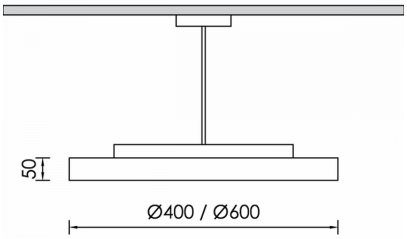

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	CM0888CL002ON
Product family	FIGO
Diffuser	Microprismatic
Control Gear	Built-in ECG
Options for Dimming Control	On-Off
Height	50 mm
Diameter	600 mm

Electrical data

Consumption	60 W
Performance	75 lm/W
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	VW
Beam	93º
Luminous Flux	4500 lm
CRI CCT	927
Glare Indicator Ugr Longwise Optics	19
Glare Indicator Ugr Parallel Optics	19

Light distribution

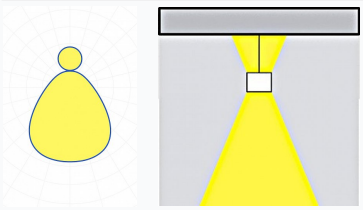

Safety characteristics

IK	04
IP	40

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%