



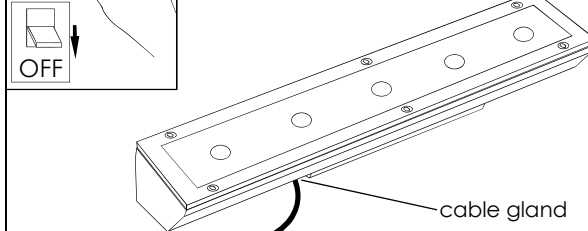



# DENUS OUTDOOR H.P.LED

⊕ outdoor/ facade



## 1 Installation Make waterproof wiring connection.




Use waterproof connector, minimum IP65





Tool accessories



## 2 Screw the U holding system on the wall /ground /ceiling surface. Use wall plugs.

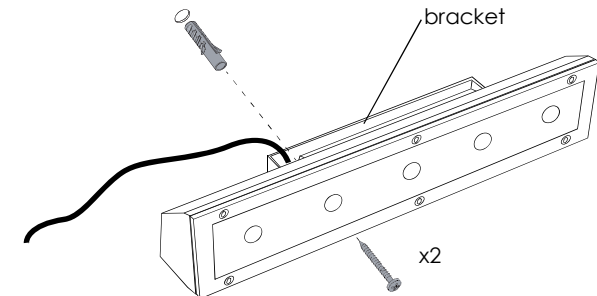

bracket dimensions

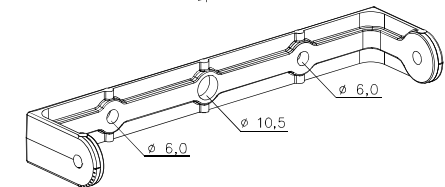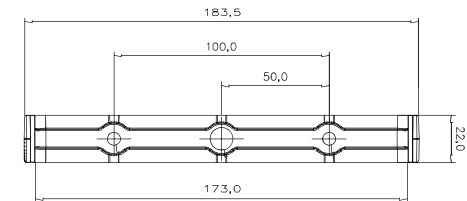


### USER INSTRUCTIONS

- The installation of the unit must be done by a qualified electrician.
- The unit must be earthed in case an earth connecting point exists.
- Ensure that the mains is switched off during servicing.
- Do not use bulb(s) bigger than the indicated on units name-plate or packaging.
- Ensure that after the installation, the unit is properly fixed and the cable clamps (if exist) are well tightened.
- Manufacturer will not accept liability for injury or damage resulting from incorrect use or installation
- The unit is not intended to operate in loop connection.
- Wall plugs and terminals are not included.
- LED modules are replaced only by the manufacturer.

### CAUTION


Wear anti-static gloves before you touch LED systems



IP65

### CAUTION

Replace any cracked shield



**BR//GHT**  
SPECIAL LIGHTING

### Factory

5 Kefalovrisou Str., Monomati, Acharnai, P.O. Box 13677, Athens, Greece | Tel: (+30) 210 6208 230  
E-mail: info@bright.gr | www.bright.gr

