
# SEDO BENE 10



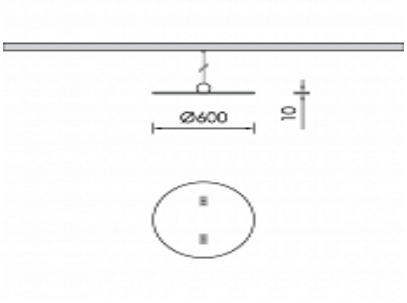


## Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

### General Information

| | |
|---|---|
| Housing | Acoustic Panel |
| Product code | PRA0444CL017DA |
| Product family | BENE |
| Diffuser | PMMA |
| Control Gear | Remote Electronic Driver |
| Height | 10 |
| Diameter | 600 |


### Electrical data


| | |
|---|---|
| Consumption | 4,4 |
| Performance | 88.18 |
| Ripple | 3 |
| Power Factor | 0.96 |


### Luminaire Output

| | |
|---|---|
| Beam Type | M |
| Beam | 30º |
| Luminous Flux | 388 |
| CRI CCT | 927 |

### Light distribution





### Safety characteristics

| | |
|---|---|
| IK | 04 |
| IP | 20 |

### Temperature Operating Conditions

| | |
|---|---|
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |