
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# BENE 5F MOB



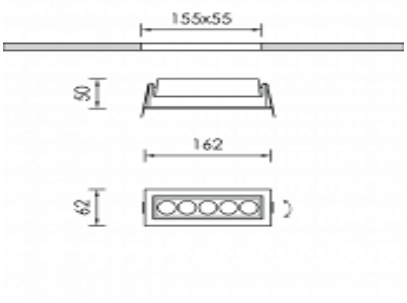


## Product Details

CE LM80 LM79 TM21 REACH Source Type SMD LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | DL5655CL002DA |
| Product family | BENE |
| Diffuser | |
| Control Gear | Remote Electronic Driver |
| Width | 62 |
| Length | 162 |
| Height | 50 |


### Electrical data


| | |
|---|---|
| Consumption | 9 |
| Performance | 95 |
| Nominal Voltage | 230 |

### Luminaire Output

| | |
|---|---|
| Beam Type | W |
| Beam | 38º |
| Luminous Flux | 855 |
| CRI CCT | 927 |

### Light distribution




### Safety characteristics

| | |
|---|---|
| IK | 04 |
| IP | 20 |

### Temperature Operating Conditions